

FRP ROOFING & SIDING PANELS

STANDARD PROFILE SELECTION GUIDE



Note: The 7.2 x 1.5" and 4.2 x 1 1/16" profiles are the most commonly used and most readily available of the Resolite FRP panels. For other standard profiles availability and minimum order requirements, contact Customer Service Department.

- Note:
1. Panels are manufactured in standard lengths from 4' to 30'.
 2. Coverage width and length tolerance for all panel profiles is 1/4".
 3. Stock panels available in 7.2 x 1.5" and 4.2 x 1-1/16". Contact Resolite's Customer Service for availability.


7.2 x 1.5"

Fire Rated			Non-FR		Load Span Data
	FS25A/ CRFS25A			Ac/ CR-Ac	
Tred- Safe	'40' Series	'30' Series	RFM	'30' Series	
*	*	*	*	*	Please contact Resolite

4.2 x 1-1/16"

Fire Rated			Non-FR		Load Span Data
	FS25A/ CRFS25A			Ac/ CR-Ac	
Tred- Safe	'40' Series	'30' Series	RFM	'30' Series	
*	*	*	*	*	Please contact Resolite

7 X 1.5"

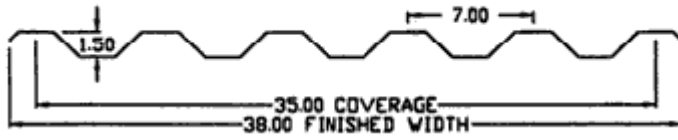

	Fire Rated		Non-FR		Load Span Data
	FS25A/ CRFS25A		Ac/ CR-Ac		
Tred-Safe	'40' Series	'30' Series	RFM	'30' Series	
OPT.	*	*	OPT.	*	Please contact Resolite

2-1/2 x 1/2"



	Fire Rated		Non-FR		Load Span Data
	FS25A/ CRFS25A		Ac/ CR-Ac		
Tred-Safe	'40' Series	'30' Series	RFM	'30' Series	
		*		*	Please contact Resolite

DECK 6 x 2-1/8"



	Fire Rated		Non-FR		Load Span Data
	FS25A/ CRFS25A		Ac/ CR-Ac		
Tred-Safe	'40' Series	'30' Series	RFM	'30' Series	
Vinyl Ester Resin					Please contact Resolite

Return to [Roofing & Siding Panels](#)